




Insulated Protractor Gauge

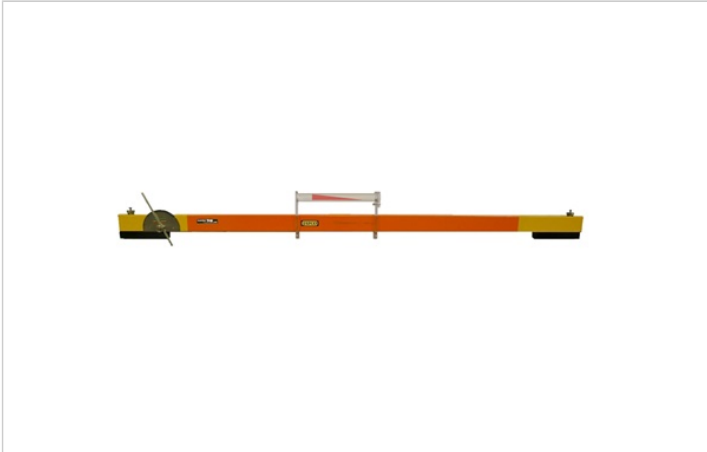

PRODUCT DESCRIPTION

The insulated protractor gauge is designed to provide protection to the operator when working near to live conductor rails whilst inspecting / checking switchblades.

Thumbnail	Part Number	Network Rail Reference	Description
	LT/RG/69	0039/127045	Insulated protractor gauge
	N/A	0057/075502	Replacement stepped gauge. Range 1 - 15mm in 1mm increments

SPECIFICATION

- Insulated in accordance to BS8020:2011
- Stainless steel protractor gauge and protractor bar
- Protractor gauge and protractor bar engraved to the latest Network Rail requirements
- Protractor gauge engraved from 40° to 90° to 40° in 5° increments, subdivided by 1°
- Supplied with taper gauge to measure vertical distortion 'hogging'
- Carrying handle incorporates storage facility for taper gauge
- Stepped gauge (plastic) - range 1 -15mm in 1mm increments
- Weight (protractor gauge complete with taper gauge): 2.95 Kgs